


WALL STARTER KITS

Enables new masonry walls to be secured to existing structures without the needs for traditionally cutting and damaging brickwork.

Suitable for both internal and external applications.

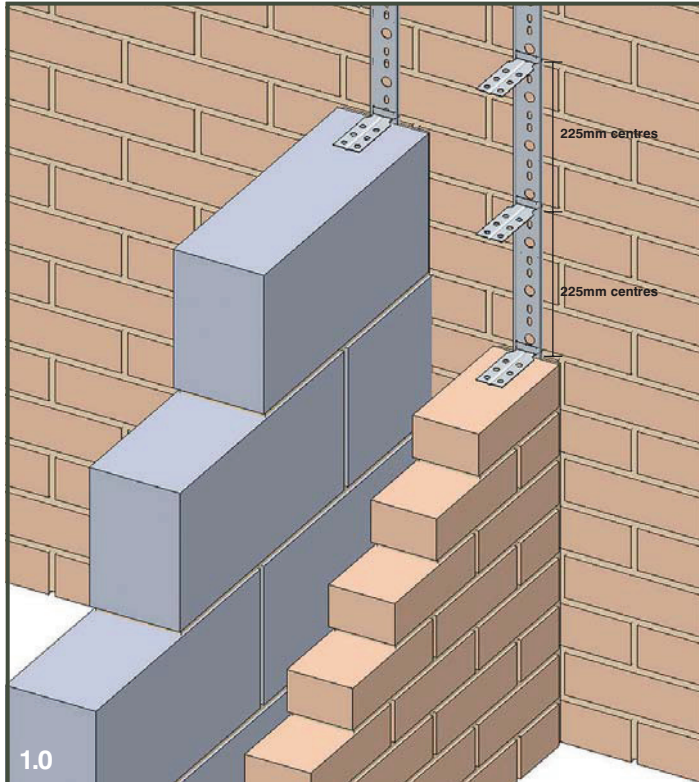


1.0 WTUWS Wincro Universal Wall Starter

The Wincro Universal Wall Starter Kit comprises of a corrosion resistant base, which is screwed to the existing wall using the plugs and coachscrews supplied, and a stainless steel sliding wall tie that will accommodate any common size or type of masonry.

It will resist a wind load of 4.5kN over 2400mm. Each pack includes all the necessary fixings to construct a single skin of masonry 2400mm high.

- Internal and external use
- Brickwork, blockwork and random stone
- Single leaf or cavity wall
- Masonry up to 8 metres high
- Wall widths 60mm to 250mm
- Imperial and metric masonry
- Meets with NHBC technical requirements
- Stainless steel for complete corrosion resistance

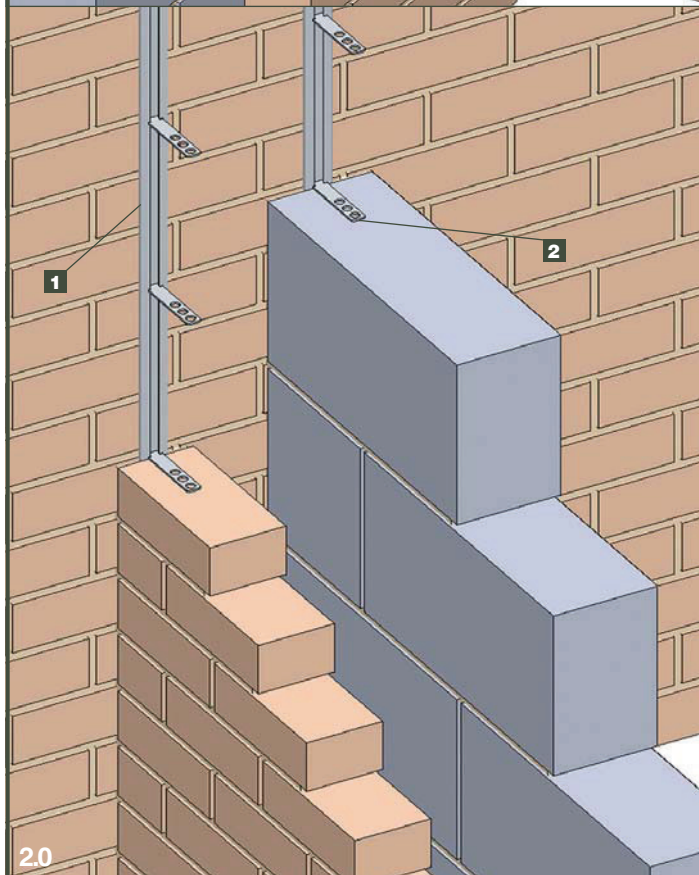

2.0 Wincro Alternative using WC36 Surface Fixed Channel and WTS3C36 Wall Ties

Comprising WC36 stainless steel channel, fixed with plug and screw into pre-drilled holes and supplied with WTS3C36 channel ties. Lengths available from 100mm to 6m.

- 1** WC36
- 2** WTS3C36 Wall Ties at 225mm Vertical Centres

Standard length 3000mm.
Other lengths to special order,